

Asymmetric Quantum Shot Noise in Quantum Dots

Hans-Andreas Engel and Daniel Loss

*Department of Physics and Astronomy, University of Basel,
Klingelbergstrasse 82, CH-4056 Basel, Switzerland*

We analyze the frequency-dependent noise of a current through a quantum dot which is coupled to Fermi leads and which is in the Coulomb blockade regime. We show that the asymmetric shot noise as function of frequency shows steps and becomes super-Poissonian. This provides experimental access to the quantum fluctuations of the current. We present an exact calculation for a single dot level and a perturbative evaluation of the noise in Born approximation (sequential tunneling regime but without Markov approximation) for the general case of many levels with charging interaction.

The shot noise is a striking consequence of charge quantization and allows to characterize the transport of individual electrons [1]. The symmetry of the noise $S(\omega)$ is important: For a classical stationary system, the noise (for autocorrelations) is always symmetric in the frequency ω . However, for a quantum system, the noise can be asymmetric due to the non-commutativity of current operators at different times. It was recently found that such an asymmetric noise can be detected since the noise frequency ω corresponds to a quantum of energy $\hbar\omega$ which is transferred from the system to the measurement apparatus [2, 3, 4] which was demonstrated experimentally [5]. This means that antisymmetric quantum effects in the noise can be measured and isolated from the classical (symmetric) effects. We show that striking asymmetric effects appear in the shot noise $S(\omega)$ of a quantum dot with steps as function of ω , giving a super-Poissonian Fano factor. Our analysis is based on a perturbative approach which remains valid in the quantum limit with large ω (where a Markov approximation typically invoked would not be valid). We confirm our perturbative results by an exact calculation of the noise for a dot with a single level. We note that quantum dots are good candidates for an experimental test of our predictions since such systems have been studied extensively over the years, both experimentally and theoretically [6, 7, 8, 9, 10, 11].

We consider the operator I_l which describes the current in a lead l . We define the current noise,

$$S_{ll'}(\omega) = \int_{-\infty}^{\infty} dt e^{i\omega t} [\langle I_l(t)I_{l'} \rangle - \langle I_l \rangle \langle I_{l'} \rangle], \quad (1)$$

in terms of the (non-symmetrized) correlation function, $\langle I_l(t)I_{l'} \rangle = \text{Tr } I_l(t)I_{l'}\bar{\rho}$. Here, $\bar{\rho}$ is the stationary density matrix (of the full quantum system). Note that $I_l(t)I_{l'}$ is not a Hermitian operator and thus does not correspond to a classical observable. How should we interpret Eq. (1)? On the one hand, one can avoid the non-Hermitian operator by arguing heuristically that Eq. (1) is “unphysical” and by instead considering the correlation function in terms of the symmetrized operator $\frac{1}{2}[I_l(t)I_{l'} + I_{l'}I_l(t)]$ [12]. One then obtains the symmetrized noise, $S_{ll'}^{\text{sym}}(\omega) = \frac{1}{2}[S_{ll'}(\omega) + S_{l'l}(-\omega)]$. For $l = l'$, this noise does not depend on the sign of ω . This corresponds to a measurement apparatus [2, 3, 4] which does not discriminate between absorption and emission of energy by the sys-

tem, and thus cannot detect all noise characteristics. On the other hand, we have $\langle I_l(-t)I_{l'} \rangle = \langle I_{l'}(t)I_l \rangle^*$ and thus $S_{ll'}(\omega) = S_{l'l}(\omega)^*$, since I_l is Hermitian and $\bar{\rho}$ stationary. Thus, $S_{ll}(\omega)$ is a real quantity which can be regarded as an observable. Indeed, there are setups, where $S_{ll}(\omega)$ can be accessed experimentally [2, 3, 4, 5]. This justifies to consider the asymmetric quantum noise [Eq. (1)] as we do in the following.

Quantum dots. To illustrate the presence of asymmetric shot noise contributions due to quantum effects, we consider now a concrete system of a quantum dot in the Coulomb blockade regime [13], coupled to Fermi leads $l = 1, 2, \dots$ at chemical potentials μ_l . When only a single dot level is present, the noise can be calculated even exactly [7] (see below). This is however not possible for systems with many levels and charging interaction, for which we now develop a perturbative approach. We assume weak coupling such that current and noise are dominated by the sequential tunneling (ST) contributions, valid for $kT > \gamma$ with temperature T and level width γ . We model the combined system with the Hamiltonian $H = H_{\text{lead}} + H_d + H_T$, which describes leads, dot, and the tunnel coupling between leads and dot, resp., and with $H_0 = H_{\text{lead}} + H_d$. We let $H_{\text{lead}} = \sum_{lk\sigma} \epsilon_{lk} c_{lk\sigma}^\dagger c_{lk\sigma}$, where $c_{lk\sigma}^\dagger$ creates an electron in lead l with orbital state k , spin σ , and energy ϵ_{lk} . The electronic dot states $|n\rangle$ are described by $H_d|n\rangle = E_n|n\rangle$, including charging and interaction energies. We use the standard tunneling Hamiltonian $H_T = \sum_{lpk\sigma} t_{lp}^\sigma c_{lk\sigma}^\dagger d_{p\sigma} + \text{H.c.}$, with tunneling amplitude t_{lp}^σ and where $d_{p\sigma}^\dagger$ creates an electron on the dot with orbital state p and spin σ . The state of the combined system is given by the full density matrix ρ , while the electronic states of the dot are described by the reduced density matrix, $\rho_S = \text{Tr}_R \rho$, where the trace is taken over the leads. We assume that at some initial time t_0 the full density matrix factorizes, $\rho(t_0) = \rho_S^0 \rho_R^0$, with the equilibrium density matrix of the leads, ρ_R^0 . From the von Neumann equation $\dot{\rho} = -i[H, \rho]$ one finds [14] the generalized master equation for the reduced density matrix, $\dot{\rho}_S(t) = -iL_S \rho_S(t) - \int_{t_0}^t dt' M(t') \rho_S(t-t')$, where the kernel M is the self-energy superoperator. Since we consider the weak coupling regime, we proceed with a systematic lowest-order expansion in H_T . We obtain $M(\tau) = \text{Tr}_R L_T e^{-iL_0\tau} L_T \rho_R^0$, where we define

the superoperators $L_S X = [H_d, X]$, $L_0 X = [H_0, X]$, and $L_T X = [H_T, X]$. In the following, we work in the Laplace space, $f(t) \mapsto f(\omega) = \int_0^\infty dt e^{i\omega t} f(t)$ (we take $\text{Im } \omega > 0$ but our results remain well-defined for $\text{Im } \omega \rightarrow 0$). Then, the time evolution of ρ_S reads

$$-\rho_S(t_0) - i\omega \rho_S(\omega) = \mathcal{M}(\omega) \rho_S(\omega), \quad (2)$$

with $\mathcal{M}(\omega) = -iL_S - M(\omega)$ and with the lower boundary of the Laplace transformation shifted to t_0 . We take $t_0 \rightarrow -\infty$ and assume that the system has relaxed at the much later time $t = 0$ into its stationary state $\bar{\rho}_S = \rho_S(0) = \lim_{\omega \rightarrow 0} (-i\omega) \rho_S(\omega)$. We multiply Eq. (2) by $-i\omega$, take $\omega \rightarrow 0$, and find the equation $\mathcal{M}(0) \bar{\rho}_S = 0$ from which we get $\bar{\rho}_S$.

Current. We calculate the current I_l flowing from the dot into lead l and vice versa. The current operators are $I_l(t) = (-1)^l e \dot{q}_l(t) = (-1)^l i e [H_T, q_l(t)]$ where $q_l = \sum_{k\sigma} c_{lk\sigma}^\dagger c_{lk\sigma}$ is the number of electrons in lead l . We choose the sign of I_l such that $\langle I_1 \rangle = \langle I_2 \rangle$ in the case of two leads. We now introduce the projectors $P = \rho_R^0 \text{Tr}_R$ and $Q = \mathbb{1} - P$ with the properties $PL_T P = 0 = PI_l P$ and $PL_0 = L_0 P$. We evaluate $\langle I_l \rangle$ by inserting $P + Q = \mathbb{1}$ and find $\langle I_l(t) \rangle = \text{Tr } I_l Q e^{-i(L_0 + L_T)(t-t_0)} \rho(t_0) = -i \text{Tr } I_l \int_{t_0}^t dt' Q e^{-iL_0(t-t')} L_T P \rho(t') + O(H_T^3)$. This motivates introducing the following superoperators, $W_l^f = W_l^> + W_l^<$ with $W_l^>(\tau) = -i \text{Tr}_R I_l e^{-iL_0 \tau} L_T \rho_R^0$ and $W_l^<(\tau) = -i \text{Tr}_R L_T e^{-iL_0 \tau} I_l \rho_R^0$, and $W_{l,l'}(\tau) = \text{Tr}_R I_l e^{-iL_0 \tau} I_{l'} \rho_R^0$. Note that these superoperators act only on the dot space, which considerably simplifies further evaluations. In the ST regime, the current is

$$\langle I_l \rangle = \text{Tr}_S W_l^f(\omega=0) \bar{\rho}_S. \quad (3)$$

This implies that the superoperator W_l^f corresponds to the current.

Quantum shot noise. We evaluate the noise [Eq. (1)] in lowest order in H_T but without any further approximation. It is sufficient to consider $t > 0$, since $\langle I_l(-t) I_{l'} \rangle = \langle I_{l'}(t) I_l \rangle^*$. Using again $P + Q = \mathbb{1}$ we get $\langle I_l(t) I_{l'} \rangle = \text{Tr } I_l Q e^{-iL_T t} P I_{l'} Q \bar{\rho} + \text{Tr } I_l Q e^{-iL_T t} Q I_{l'} P \bar{\rho}$, while we neglect the higher-order term $\text{Tr } I_l Q e^{-iL_T t} Q I_{l'} Q \bar{\rho}$ in H_T . The goal is to factor out one of the following expressions. First, we expand $Q e^{-iL_T t} Q = Q e^{-iL_0 t} Q + O(H_T)$ to leading order. Second, we evaluate the conditional time evolution $\rho_S^c(t) := \text{Tr}_R e^{-iL_T t} \rho_R^0$. We find that ρ_S^c is the formal solution of Eq. (2) with initial value $\mathbb{1}$, thus $\rho_S^c(\omega) = -[i\omega + \mathcal{M}(\omega)]^{-1}$ [15]. Finally, we use $\text{Tr}_R I_l Q e^{-iL_T t} \rho_R^0 = \int_0^t dt' W_l^>(t-t') \rho_S^c(t')$ and $\text{Tr}_R I_l Q e^{-iL_T t} Q I_{l'} \rho_R^0 = W_{l,l'}(t) + \int_0^t dt' \int_0^{t'} dt'' W_l^>(t-t') \rho_S^c(t'-t'') W_{l'}^<(t'')$. We obtain the noise correlation in the ST regime,

$$\begin{aligned} S_{ll'}(\omega) = & 2 \text{Tr}_S \left\{ W_l^f(\omega) \rho_S^c(\omega) [W_{l'}^>(0) + W_{l'}^<(\omega)] + \right. \\ & + W_{l'}^f(-\omega) \rho_S^c(-\omega) [\tilde{W}_l^>(0) + \tilde{W}_l^<(-\omega)] \\ & \left. + W_{l,l'}(\omega) + \tilde{W}_{l,l'}(-\omega) \right\} \bar{\rho}_S. \end{aligned} \quad (4)$$

Here, ω is real and the limit $\omega \rightarrow 0$ is well behaved [the $\delta(\omega)$ contribution is cancelled by $\langle I_l \rangle \langle I_{l'} \rangle$ in Eq. (1)]. For a superoperator $\mathcal{S}$, we have defined $\tilde{\mathcal{S}}$ such that $(\mathcal{S}A)^\dagger = \tilde{\mathcal{S}}A^\dagger$, thus $\mathcal{S}_{bc|nm} := \langle b | (\mathcal{S}|n\rangle\langle m|) | c \rangle = (\tilde{\mathcal{S}}_{cb|mn})^*$, and $\tilde{\mathcal{S}}(\omega)A = \int_0^\infty dt e^{i\omega t} [\mathcal{S}(t)A]^\dagger$. For deriving Eqs. (3)-(4), we have made no Markov approximation where we would evaluate $M(t)e^{itL_0}$ at $\omega = 0$ and equivalently for the other superoperators [16]. We note that for the current [Eq. (3)], $\mathcal{M}$ and W_l^f are both evaluated at $\omega = 0$, thus the stationary current does not contain non-Markovian effects. However, the Markov approximation changes the noise, which for $l = l'$ becomes symmetrized, $S_{ll}^{\text{Mkov}}(\omega) = S_{ll}^{\text{Mkov}}(-\omega)$ [17]. In particular, the antisymmetric noise contribution (showing pure quantum effects) cannot be obtained in the Markov approximation.

We now return to the exact expression of the noise in Born approximation [Eq. (4)] and explicitly calculate the matrix elements of the various superoperators,

$$-M(t)e^{itL_0} \rho_S = \sum_l (G_l^+ \rho_S - g_l^+ \rho_S) + \text{h.c.}, \quad (5)$$

$$W_l^{<(>)}(t)e^{itL_0} = (-1)^l e \left(\tilde{G}_-^l \mp g_-^l \right), \quad (6)$$

$$W_{l,l'}(t)e^{itL_0} = \delta_{ll'} e^2 g_+^l, \quad (7)$$

with $G_\pm^l = G_\pm^{\text{out}}(t) \pm G_\pm^{\text{in}}(t)$ and $g_\pm^l = \sum_{bn} |b\rangle\langle n| \text{Tr}_S \{ G_\pm^l |n\rangle\langle b| \}$ [18]. We define $t_{nm}^{\text{ls}} = \sqrt{2\pi\nu_{l\sigma}} \sum_p t_{lp}^\sigma \langle n | d_{p\sigma} | m \rangle$, with spin dependent density of states $\nu_{l\sigma}$ in lead l . The matrix elements of the remaining superoperators are

$$G_{bc|nm}^{l,\text{in}}(\omega) = \sum_\sigma \frac{t_{mc}^{\text{ls}} t_{nb}^{\text{ls}*}}{2} \left(f_l(\Delta_{bn} - \omega) + \frac{ip_{bn}^+}{\pi} \right), \quad (8)$$

$$G_{bc|nm}^{l,\text{out}}(\omega) = \sum_\sigma \frac{t_{cm}^{\text{ls}*} t_{bn}^{\text{ls}}}{2} \left(1 - f_l(\Delta_{nb} + \omega) + \frac{ip_{nb}^-}{\pi} \right), \quad (9)$$

with $\Delta_{bn} = E_b - E_n$, and $p_{bn}^\pm = \log\{2\pi kT / [(1 \mp 1)\epsilon_c / 2 \pm \Delta_{bn} - \omega]\} + \text{Re } \psi[\frac{1}{2} + i(\Delta_{bn} \mp \omega - \mu_l) / 2\pi kT]$. Here, ψ is the digamma function. The terms $p_{bn}^\pm$ arise from the principal values $\mathcal{P} \int_0^{\epsilon_c} d\epsilon f_l(\epsilon) / (\epsilon - \Delta_{bn} + \omega)$ and $\mathcal{P} \int_0^{\epsilon_c} d\epsilon [1 - f_l(\epsilon)] / (\Delta_{nb} - \epsilon + \omega)$ with bandwidth cutoff ϵ_c . If we neglect ω with respect to the large energies Δ_{bn} and $\epsilon_c - \Delta_{nb}$, the first term of $p^\pm$ (and thus ϵ_c) drops out in $S_{ll'}(\omega)$. We note that the contribution corresponding to Eq. (7) has been calculated for the symmetrized noise of a single electron transistor with a continuous spectrum, using a phenomenological Langevin approach [19]. With these results, Eqs. (4) and (5)-(9), it is straightforward to find $S_{ll'}(\omega)$ for an arbitrary dot spectrum; one only needs to evaluate simple algebraic expressions.

We now identify the regime where the asymmetric noise properties become most apparent. Asymmetries arise from the ω dependence of Eqs. (8)-(9), i.e., are most prominent for $|\omega| > kT$, with steps occurring at $|\omega| \simeq |\Delta_{bn} - \mu_l|$ (see below). In this regime, the Markov approximation breaks down [16] and the noise probes

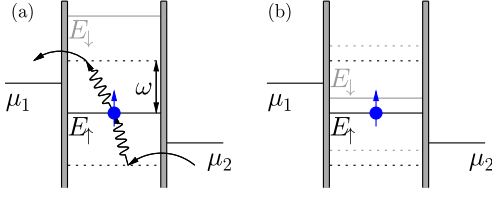


Figure 1: Quantum dot coupled to two leads and in the sequential tunneling regime. (a) Large Zeeman splitting, $\Delta_z > \Delta\mu + \omega$. When the dot is empty and $\omega \geq E_\uparrow - \mu_2$, an electron from lead 2 absorbs energy ω and tunnels for a short time onto the dot, contributing to the noise S_{22} . Similarly, for $\omega > \mu_1 - E_\uparrow$, the electron on the dot can tunnel into lead 1, contributing to S_{11} . (b) Smaller Zeeman splitting, here $\Delta_z = \Delta\mu/4$. When the energies $E_{\uparrow,\downarrow} \pm \omega$ (dotted lines) are aligned with $\mu_{1,2}$, the shot noise has a step, see Fig. 2 (solid line).

non-Markovian effects. Further, since the ST regime is valid for $kT > |t|^2$, we have $\omega > |t|^2$. Thus, the conditional time evolution becomes $\rho_S^c(\omega) \approx i/\omega$, since $\mathcal{M}(\omega) \sim t^2$. For the noise [Eq. (4)] only the two last terms are relevant, since they are of order t^2 while the other terms are of order t^4/ω and can be neglected. Less formally, this is because multiple tunneling processes [described by $\rho_S^c(\omega)$] do not occur on the short time scales corresponding to large ω . Thus, only the individual (uncorrelated) tunneling events contribute, leading to shot noise.

Next, we discuss specific cases, see Fig. 1, where a dot is coupled to two leads $l = 1, 2$ and a voltage bias $\Delta\mu = \mu_1 - \mu_2$ is applied. We assume single energy level spacing and Coulomb charging energy larger than temperature, bias, and noise frequency. We consider the dot states $|0\rangle$, with an even number of electrons and state $|\sigma\rangle$ where an electron with spin $\sigma = \uparrow, \downarrow$ is added to the dot [20]. For an applied magnetic field B , the Zeeman splitting is $\Delta_z = g\mu_B B = E_\downarrow - E_\uparrow > 0$. We consider the ST regime, $\mu_1 > E_\uparrow > \mu_2$, and define the tunneling rates $\gamma_l^\sigma = |t_{0\sigma}^\sigma|^2$.

Dot with single level. First, we assume a large Zeeman splitting such that only the spin ground state $|\uparrow\rangle$ is relevant, see Fig. 1(a), and we omit the index $\uparrow$. Since in this regime only one dot level is involved, there are no charging effects between different levels. Thus, $H_d = E_\uparrow d^\dagger d$ and so the full Hamiltonian H is bilinear and can be solved exactly. The symmetrized noise was calculated for this system and discussed for $\omega = 0$ [7]. We now calculate the asymmetric noise [Eq. (1)] for finite ω exactly. For this, we solve the Heisenberg equations for $d(t)$ and $c_{lk}(t)$ and find the current operator, $I_l(t)/e(-1)^l = \sum_{k'l'k''} [j_{k'}^\dagger c_{l'k'}^\dagger c_{lk} + \text{H.c.}] + \sum_{l'l'k''} (\gamma_l/|t_l|^2) j_{k'}^\dagger j_{k''}^\dagger c_{l'k'}^\dagger c_{l''k''}$. Here, the lead operators c_{lk} are evaluated at time t_0 (i.e., when the leads are at equilibrium) and we have defined $j_{k'} = i t_{l'}^* t_{l'} e^{i(\epsilon_{l'k'} - \epsilon_{lk})(t-t_0)} / (\epsilon_{l'k'} - E_\uparrow - i\gamma)$ and $\gamma = (\gamma_1 + \gamma_2)/2$. Now we insert $I_l(t)$ into Eq. (1) and readily obtain the asymmetric noise, containing all quantum effects. We

consider the coherent non-perturbative regime of strong coupling to the leads in the quantum limit of large frequencies, $\omega > \gamma > kT$. We obtain the shot noise

$$S_{ll}^a(\omega) = \sum_{l', \pm} \frac{\pm \gamma_l \gamma_{l'}}{2\pi\gamma} \theta(\omega \pm \mu_{l'} \mp \mu_l) [h(\mu_{l'}) - h(\mu_l \mp \omega)], \quad (10)$$

where $h(\epsilon) = \arctan[(\epsilon - E_\uparrow)/\gamma]$. Note that the noise shows steps at $\omega = \pm |E_\uparrow - \mu_l|$ with width γ [21]. Furthermore, for $\omega > |E_\uparrow - \mu_l|$, $\Delta\mu$, the noise is asymmetric and saturates at $S_{ll}^a(\omega) = e^2 \gamma_l$, while $S_{ll}^a(-\omega) = 0$.

Let us now consider the ST regime $kT > \gamma$ in the exact solution. For $\omega > \gamma$, we then find

$$S_{ll}^a(\omega) = \sum_{l', \pm} \frac{\gamma_l \gamma_{l'}}{2\gamma} [\delta_{1,\mp 1} \pm f_{l'}(E_\uparrow)] [\delta_{1,\pm 1} \mp f_l(E_\uparrow \pm \omega)]. \quad (11)$$

Again, the noise shows a pronounced asymmetry. We can now compare Eq. (11) with the noise obtained in the perturbative approximation [Eq. (4)] and find that they agree. We further consider $\omega > \Delta\mu + kT$ in Eq. (11) such that $f_l(E_\uparrow + \omega) = 0$ and $f_l(E_\uparrow - \omega) = 1$, leaving $f_l(E_\uparrow)$ unrestricted. In this case, the (asymmetric) shot noise is

$$S_{ll}^a(\omega) = e^2 \gamma_l, \quad (12)$$

whereas $S_{ll}^a(-\omega) = S_{12}^a(\pm\omega) = 0$; this is the same result as we have found for strong coupling [Eq. (10)]. The interpretation is that for $S_{ll}^a(-\omega)$ the detector absorbs energy ω , which, however, cannot be provided by any tunneling process. On the other hand, for $S_{ll}^a(\omega)$ the detector provides energy ω . Thus, if the dot is empty, an electron with energy $E_\uparrow - \omega$ can tunnel from the Fermi sea l into the dot, and, if the dot is filled, an electron can tunnel from the dot into an unoccupied lead state of energy $E_\uparrow + \omega$, see Fig. 1(a) [22]. In both cases, the tunneling occurs with rate γ_l and thus the contribution to the autocorrelation is $e^2 \gamma_l \delta(t)$. Note that for $|E_\uparrow - \mu_l| > kT$, the noise is $S_{11}^a(\omega) = e\langle I \rangle (\gamma_1 + \gamma_2)/\gamma_2$. Thus, for large ω , the frequency dependent Fano factor, $F_{11}(\omega) = S_{11}(\omega)/e\langle I \rangle$, is 2 for $\gamma_1 = \gamma_2$, and can even become larger for $\gamma_1 > \gamma_2$, in contrast to the Markovian case where we find it to be 1. Thus, we find that the quantum shot noise is *super-Poissonian*. Moreover, away from the ST regime, say for $E_\uparrow + kT > \mu_l$, the dot remains always in state $|0\rangle$ and only a small (higher-order in H_T) cotunneling current $\langle I \rangle$ flows through the dot [11]. However, the noise can still be of lower order, it is $S_{ll}^a(\omega) = e^2 \gamma_l f_l(E_\uparrow - \omega)$ for large $|\omega|$, resulting in a large Fano factor $F_{ll}(\omega)$ and super-Poissonian shot noise.

Dot with two or more levels. Second, we consider the regime where the state $|\downarrow\rangle$ becomes relevant and charging interaction enters (here no exact solution is available). We consider a small Zeeman splitting such that $\mu_1 > E_{\uparrow,\downarrow} > \mu_2$ and $f_l(E_\uparrow) \approx f_l(E_\downarrow)$, see Fig. 1(b). Using Eq. (4), we calculate the noise $S_{11}^b(\omega)$ and plot it in Fig. 2 (solid line). For large $|\omega|$, such that $f_l(E_\sigma + |\omega|) = 0$ and $f_l(E_\sigma - |\omega|) = 1$, the noise vanishes for $\omega < 0$ while for

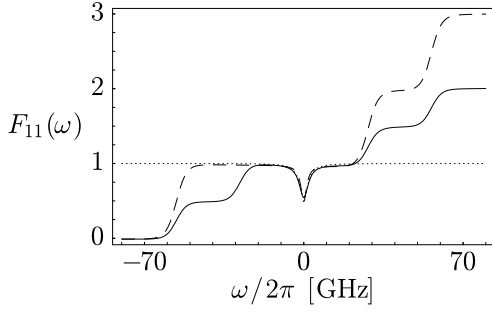


Figure 2: The Fano factor $F_{11}(\omega) = S_{11}(\omega)/e\langle I \rangle$ in the shot noise regime $\Delta\mu > kT$ as function of noise frequency ω . (Asymmetric noise at frequencies up to 90 GHz has been measured [5].) We consider $T = 100$ mK, $\Delta\mu/e = 460$ μ V, $E_{\uparrow} = (\mu_1 + \mu_2)/2$, $\gamma_1 = \gamma_2 = 5 \times 10^9$ s $^{-1}$, and $g = 2$. We use the full expression for the noise S_{11}^b [Eq. (4)] (solid line) and within Markov approximation, $S_{11}^{b,\text{Mkov}}$, (dotted line), for $B = 1$ T [see Fig. 1(b)], thus $\Delta_z = \Delta\mu/4$ and $\langle I \rangle = 530$ pA. We also show S_{11}^c (dashed line), being strongly asymmetric, where $B = 3$ T, $\Delta_z = 3\Delta\mu/4$, and $\langle I \rangle = 400$ pA. The dip near $\omega = 0$ is due to the charging effect of the dot, while the steps at ω_i (see text) arise from additional transitions for increasing ω and provide a striking effect in the quantum shot noise. Note that these steps disappear when the noise S_{11}^b is symmetrized (some features remain for $\gamma_1 \neq \gamma_2$).

$\omega > 0$ it saturates at

$$S_{11}^b(\omega) = 2e^2\gamma \frac{\gamma_1 + \gamma_2}{\gamma_1[1 + f_1(E_{\uparrow})] + \gamma_2[1 + f_2(E_{\uparrow})]}. \quad (13)$$

More generally, for the weaker assumption $|\omega| > \gamma$, the numerator in Eq. (13) becomes $\frac{1}{2} \sum_{\nu, \pm, \sigma} \gamma_{\nu} [\delta_{1, \mp 1} \pm f_{\nu}(E_{\uparrow})] [\delta_{1, \pm 1} \mp f_i(E_{\sigma} \pm \omega)]$. Thus, the noise S_{11}^b shows four steps at $\omega_i = \pm(\mu_1 - E_{\uparrow, \downarrow})$, corresponding to the dotted lines in Fig. 1(b). The interpretation is that for increasing ω , more energy is available and more tunneling processes are allowed. Namely, if $\omega \geq -(\mu_1 - E_{\uparrow})$, an electron with spin $\uparrow$ from lead 1 can emit energy ω and tunnel onto the dot, and if $\omega \geq \mu_1 - E_{\uparrow}$, an electron on the dot with

spin $\uparrow$ can absorb energy ω and tunnel into lead 1. Analogous processes occur for spin $\downarrow$. The steps in S_{11}^b are broadened due to and temperature, and the step is $\propto \tanh[(\omega - \omega_i)/2kT]$. For $\Delta\mu > kT$, Δ_z , i.e., $f_i(E_{\sigma}) = \delta_{i1}$, the height of the steps in the Fano factor $F_{11}(\omega)$ is $\frac{1}{2}$ for $\omega_i < 0$ and $\gamma_1/2\gamma_2$ for $\omega_i > 0$. (These heights change for spin-dependent tunneling, $\gamma_i^{\uparrow} \neq \gamma_i^{\downarrow}$.) Next, we consider an intermediate Zeeman splitting, $E_{\downarrow} > \mu_1 + kT$. In this regime (c), the dot is either in state $|0\rangle$ or $|\uparrow\rangle$, while the state $|\downarrow\rangle$ is never occupied and so no additional tunneling process occurs for $\omega \geq -(E_{\downarrow} - \mu_1)$. Thus, the steps in the noise are at $\omega = \pm(\mu_1 - E_{\uparrow})$ and at $\omega = E_{\downarrow} - \mu_1$, see Fig. 2 (dashed line). For large ω , the noise saturates at

$$S_{11}^c(\omega) = e^2 \sum_{\nu=1,2} \gamma_{\nu}^{\uparrow} \frac{\gamma_{\nu}^{\uparrow} + \gamma_{\nu}^{\downarrow}[1 - f_{\nu}(E_{\uparrow})]}{\gamma_1^{\uparrow} + \gamma_2^{\uparrow}}. \quad (14)$$

Here, we have allowed for spin-dependent tunneling. If we exclude the contributions involving state $|\downarrow\rangle$ by setting $\gamma_i^{\downarrow} = 0$, we recover Eq. (12). Generally, we see that the shot noise $S_{11}(\omega)$ of a quantum dot consists of a series of steps and is monotonically increasing, apart from features near $\omega = 0$. Each dot level with energy (chemical potential of the dot) E_j gives rise to steps at $\pm(\mu_l - E_j)$ if the level is inside the bias window, $\mu_1 + kT > E_j > \mu_2 - kT$, and to a single step at $|\mu_l - E_j|$ otherwise. We stress that such a highly asymmetric $S_{11}(\omega)$ can be observed with an appropriate measurement apparatus [2, 3, 4]. For sufficiently large $|\omega|$, the anti-symmetric contribution becomes $\frac{1}{2}[S_{11}(\omega) - S_{11}(-\omega)] = \frac{1}{2}\text{sign}(\omega)S_{11}(|\omega|)$ and is, e.g., given by Eqs. (11)-(14).

In conclusion, we have derived the asymmetric shot noise of a quantum dot exactly for a single dot level and in the weak coupling regime for many levels. We have shown that the shot noise exhibits strong asymmetric and super-Poissonian effects in the quantum limit. We thank F. Marquardt, W. Belzig, G. Burkard, A. Cottet, J.C. Egues, H. Gassman, D. Saraga, and C. Schönenberger for discussions. We acknowledge support from the Swiss NSF, NCCR Nanoscience Basel, DARPA, and ARO.

-
- [1] Ya.M. Blanter, M. Büttiker, Phys. Rep. **336**, 1 (2000).
 - [2] G.B. Lesovik, R. Loosen, JETP Lett. **65** (3), 295 (1997).
 - [3] R. Aguado, L.P. Kouwenhoven, Phys. Rev. Lett. **84**, 1986 (2000).
 - [4] U. Gavish, Y. Levinson, Y. Imry, Phys. Rev. B **62**, 10637 (2000).
 - [5] R. Deblock *et al.*, Science **301**, 203 (2003).
 - [6] H. Birk, M.J.M. de Jong, C. Schönenberger, Phys. Rev. Lett. **75**, 1610 (1995).
 - [7] D.V. Averin, J. Appl. Phys. **73**, 2593 (1993).
 - [8] A.N. Korotkov, Phys. Rev. B **49**, 10381 (1994).
 - [9] S. Hershfield *et al.*, Phys. Rev. B **47**, 1967 (1993).
 - [10] D. Loss, E.V. Sukhorukov, Phys. Rev. Lett. **84**, 1035 (2000).
 - [11] E.V. Sukhorukov, G. Burkard, D. Loss, Phys. Rev. B **63**, 125315 (2001).
 - [12] L.D. Landau, E.M. Lifshitz, *Statistical Physics*, Vol. 5, §118 (Pergamon, London/Paris, 1958).
 - [13] L.P. Kouwenhoven, G. Schön, L.L. Sohn, in *Mesoscopic Electron Transport*, Vol. 345 of *NATO Advanced Study Institute, Series E*, edited by L.L. Sohn, L.P. Kouwenhoven, G. Schön (Kluwer, Dordrecht, 1997).
 - [14] E. Fick, G. Sauermaun, *The Quantum Statistics of Dynamic Processes* (Springer, Berlin, 1990).
 - [15] The formal solution of Eq. (2) corresponds to resumming an infinite number of terms. Since we evaluate the self-energy $\mathcal{M}$ in leading order, we only resum a certain subset of the higher order terms in $\rho_S^c(\omega)$.

- [16] Evaluating $M(\tau)$ explicitly, we find that it decays on a time scale $\tau_c \sim 1/kT$, i.e., the correlations induced in the leads decay within τ_c . Thus, the Markov approximation is justified for $\omega\tau_c, \gamma\tau_c \ll 1$.
- [17] In Born-Markov approximation, the autocorrelation function is always symmetric in ω for operators $\hat{X}$ with $[\hat{X}, H_0] = [\hat{X}, \rho_R^0] = 0$.
- [18] This linear map $G \mapsto g$ is the identity on operators, however, here G is a superoperator. With this notation, Eq. (5) is reminiscent of the Lindblad form, $\sum_i [A_i \rho_S A_i^\dagger - A_i^\dagger A_i \rho_S] + \text{h.c.}$
- [19] A.N. Korotkov, Europhys. Lett. **43**, 343 (1998).
- [20] This system is equivalent to the one with an additional electron on the dot and where the ground state with two electrons is a singlet $|S\rangle$ [23].
- [21] The steps coming from the θ -function are suppressed by the last factor of Eq. (10).
- [22] This is similar to photon-assisted tunneling currents, where an oscillating field provides or absorbs energy [C. Bruder, H. Schoeller, Phys. Rev. Lett. **72**, 1076 (1994)].
- [23] H.-A. Engel, D. Loss, Phys. Rev. Lett. **86**, 4648 (2001); Phys. Rev. B **65**, 195321 (2002).